



HIGH PERFORMANCE REPAIR SYSTEMS™

HPRS



REPAIR, REHABILITATION AND RESTORATION SYSTEMS FOR
REINFORCED CONCRETE AND MASONRY BASED ON PATENTED MCI®
MIGRATING CORROSION INHIBITORS TECHNOLOGY



CORTEC
CORPORATION

Environmentally Safe VpCI™/MCI® Technologies

HPRS™


high performance repair systems with extra high concentrations of MCI®

Complete multifunctional and compatible protection systems with very high durability for the repair of spalled reinforced concrete structures and surfaces. The HPRS™ system maximizes the concentration of MCI® (Migrating Corrosion Inhibitor™) molecules on embedded steel bars.


The MCI® Concept

THE CONCEPT BEHIND THE MIGRATION OF MCI® (MIGRATING CORROSION INHIBITORS™) THROUGH CONCRETE IS SIMPLE:


The migration process of MCI® molecules is based on their ability to diffuse in both vapor or liquid form. They migrate into even the smallest pores and cavities, seeking out either positively or negatively charged metal surfaces (cathodic/anodic). The creation of a protective mono-molecular layer on metals embedded in concrete is based on the physical adsorption mechanism, which means that MCI® can inhibit further corrosion of heavily corroded or scaled internal bars.

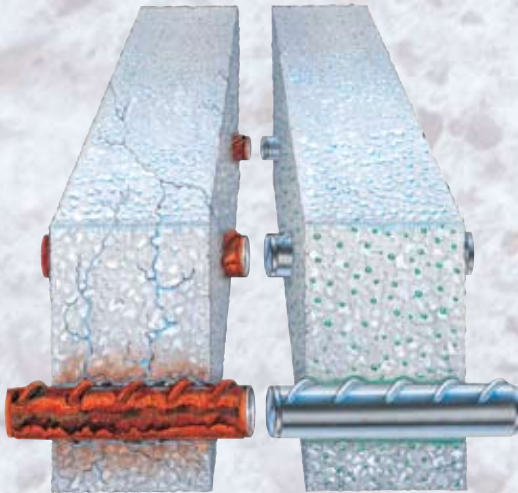

REMOVE SPALLED CONCRETE – The first step in the rehabilitation process is the removal of spalled concrete from the deteriorating structure.



CORTEC MCI® MIGRATES THROUGH CONCRETE TO PROTECT STEEL – The inhibitor will migrate a considerable distance through the concrete to deposit itself on the internal bars.




CORTEC MCI® PROTECTS THE STEEL FROM FURTHER CORROSION – The inhibitor attaches to the steel reinforcement forming a thin, protective coating of MCI® molecules. This prevents a chemical reaction between the steel and the oxygen and/or chlorides in the structure and stops further corrosion.

Sequence of HPRS™ Application:

step

1



PREPARATION OF THE BASE

Carefully scarify and remove all spalled, loose and deteriorated concrete. If the reinforcement is exposed, remove rust from the rebars by high pressure water-jet, sandblasting, wire brush or by using Cortec® VpCI-423 or VpCI-426 rust removers.

step 2



PRODUCT - MCI®-2023

MCI-2023 is a protective, passivating, anti-corrosion, bi-component grout containing MCI® molecules. Brush on MCI-2023 to achieve a 0.04 to 0.08 inch (1-2 mm) thickness on any exposed rebar or metal as soon as possible after removal of loose rust. Two coats are recommended at 0.04 inch (1 mm) per coat.

step 3



PRODUCT - MCI® -2020

MCI-2020 is a topical migrating corrosion inhibitor system formulated to migrate through the concrete, seeking out and attaching itself to the surface of reinforcing steel. Apply MCI-2020 by low pressure spray or brush onto the prepared surface until it soaks into the concrete. Immediately after the application of MCI-2020 complete Steps 4 and 5.

step 4



PRODUCT - MCI®-2039

MCI-2039, a fiber-reinforced bi-component (liquid/plasticized cement) has superior adhesive capabilities. Apply a base coat of MCI-2039 with a stiff brush at a thickness of 10 mm (0.4 inch). MCI-2039 has a coverage of 14 m² per mm (6 ft² per inch). This thin coat of MCI-2039 acts as a "bridge" for enveloping all friable parts and MCI-2020. It also creates a substrate with superior adhesion capabilities. MCI-2039 should be applied immediately after Step 3.

step 5_a



PRODUCT - MCI® -2039

MCI-2039 is also a rheoplastic, anti-shrink, thixotropic mortar with superior adhesive properties. It has a high resistance coefficient to carbon dioxide and chlorides/sulfates penetration, high mechanical strength, and a low elastic modulus. Build up the area of repair by spraying or troweling MCI-2039 into the repair area. MCI-2039 can be applied in thicknesses between 0.4 inch (10 mm) to a maximum of 2.4 inches (61 mm) per coat. Multiple applications can produce thicknesses of 8-12 inches (203-305 mm). Because MCI-2039 is thixotropic and has adhesion properties, several layers can be applied in a short period of time, even to vertical surfaces.

step 5_b



PRODUCT - MCI® -2038

MCI-2038 has the same properties as MCI-2039 but with smaller aggregates, making it an excellent finish repair mortar. Use MCI-2038 in areas requiring minimum thickness or where a smooth troweled surface is required. Apply MCI-2038 in thicknesses of .04 inch (1 mm) to 2 inches (50 mm) as above. MCI-2038 does not require wet curing or a curing compound. It will not shrink, has excellent adhesion properties, good mechanical strengths and a very low elastic modulus.



step 6



PRODUCT - MCI® ARCHITECTURAL COATING

MCI® Architectural Coating is a final coating which is acrylic-based in a water carrier. Available in a transparent or colored finish, it provides resistance to the penetration of carbon dioxide while having good water vapor transmission qualities. It also provides good resistance to ultraviolet action and to all climatic conditions, including industrial pollution and marine environments. MCI® Architectural Coating contains, and is compatible with, MCI® molecules. Apply at a rate of 159 ft²/gal (3.9 m²/l).

other color options:



Simple, Economical and Effective HPRS™ System:

1) Preparation of spalled concrete 2) MCI-2023 cementitious coating for rebar 3) MCI-2020 4) MCI-2039 repair mortar (fluid mixture applied by brush) 5a) MCI-2039 repair mortar (mixture of normal consistency for application by trowel or spray) 5b) MCI-2038 finishing mortar (if needed for smoothing surfaces and/or for small thicknesses) 6) VpCI-386 (final esthetics and protection).

On-Site Applications



LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement product shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail: info@cortecvci.com
www.CortecMCI.com

printed on recycled paper 10% post consumer

Revised: 05/06 Supersedes: 02/05.
Cortec®, VpCI™, VpCI™ Film Color of Blue®, VpCI-126®, VpCI-609®, VpCI-137®, VmCI-307®, Migrating Corrosion Inhibitors™, MCI®, MCI Grenade®, EcoWorks®, Eco Works®, EcoAir®, Eco-Corr®, Eco-Corr Film®, EcoLine®, EcoClean®, EcoShield®, EcoWeave®, EcoSpray®, EcoCoat®, Eco Emitter™, EcoSol™, Eco-Tie™, Eco-Card™, Eco-Shrink™, EcoWrap™, Eco Film™, Cor-Mitt®, Cor-Pak®, CorShield®, Corrosorb®, CorWipe®, CorVerter®, Cor Seal®, CorLam™, Cor-Fill™, Corriube™, Electricorr®, MilCorr®, GalvaCorr®, Super Corr®, HPRS®, Boiler Lizard®, Cooling Tower Frog®, Closed Loop Toad®, Cooling Loop Gator®, Pine Tree Logo®, CRP®, Metacor™, and Rust Hunter™ are trademarks of Cortec® Corporation.
©Cortec Corporation 2006. All rights reserved.